

45 Corner Ties

Muscatine County

DIETZGEN

77-4 W

FIELD BOOK

Book 2

No. 403P

T77N-R4W

Pike Township

77-4 W

45

County Closed
July 1-1942

E.V.

All information Copied.

See Book #1 for Index

8-3-42

M L

9-2-41

Lee

E.V. Final Check
9-28-42
Geodetic Survey

W 1/4 Cor sec 7 - 27-4W

17 E. of N. S. County line Rd inline
with E. & W. for found Red granite
stone approx. size 28" x 15" x 5" drilled
sank & inserted BRASS CAP STAMPED
Stone 12" deep.


28.5'	W.	of N.S.P.K.S. in Cor Post
29.3'	E.	of N.S.P.K.S. in Cor Post
29.4'	E.S.E.	of N.S.P.K.S. in gate Post
388.7'	S.S.E.	of S.E. Cor of conc. crib
170.4'	S.	of cross in W. Headwall Conc. Culvert
184.6'	S.	of cross in E. Headwall Conc Culvert

11-27-39

R.R.W. - Cos. P.

S.E. Cor

Conc. Crib

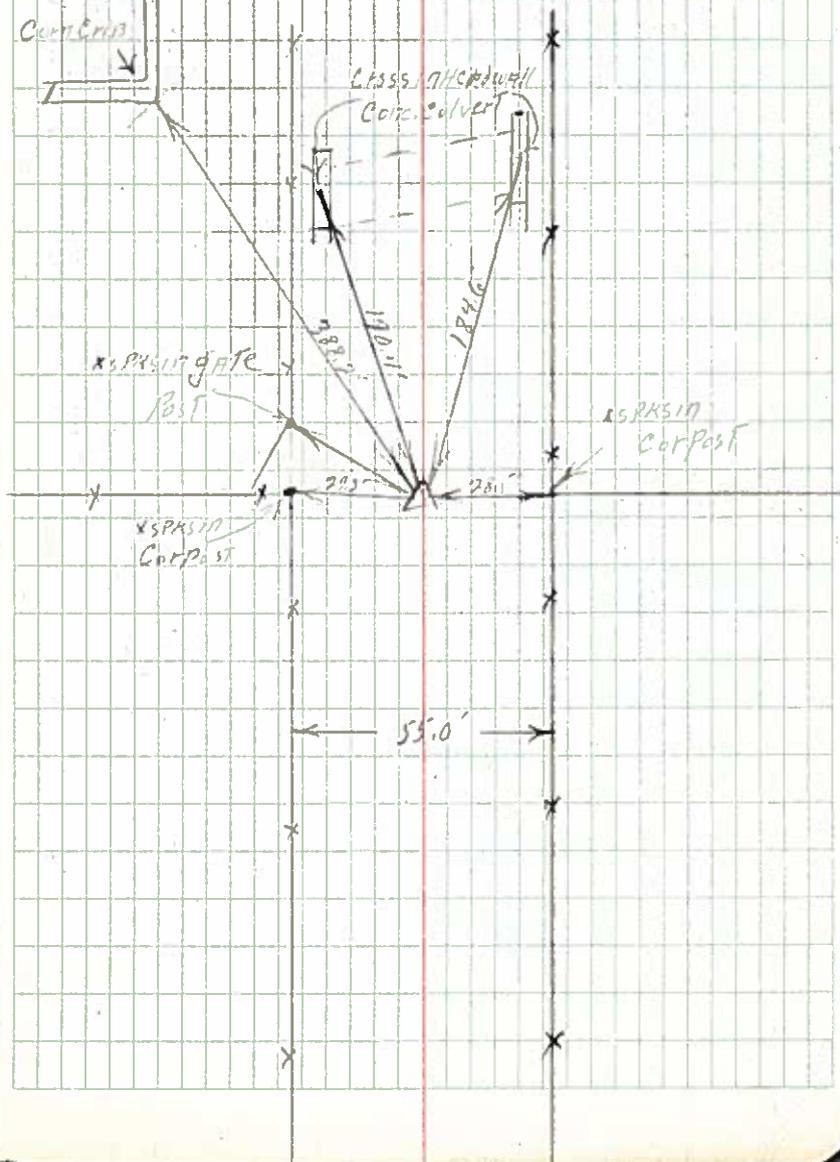


3/4 Cor sec 33-T7N-R4W-

AT POINT INDICATED BY MEASURE DUG HOLE
6' x 3' DEEP NO EVIDENCE FOUND CORNER
RESTORED BY PROPORTIONATE MEASURE-
MENTS E & W. BETWEEN KNOWN CORNERS
AND LINE BETWEEN SAID CORNERS.

SET NAIL STAMPED 33 AND
BURIED 10" DEEP

33.5'	E	OF XS PXS 17 COR POST
112.6'	NNW.	OF XS PXS 17 COR POST
70.0'	WNW.	OF XS PXS 17 GATE POST
71.3'	W.	OF XS PXS 17 COR POST
343.0'	S.S.W.	OF SW COR OF FARM RES.
312.9'	S.	OF XS PXS 17 PUR POLE
59.3'	S.S.E.	OF XS PXS 17 COR POST.
50.1'	W.	OF N 1/4 COR SEC 5-76-4W-

11-28-39
R.W. Co of P.

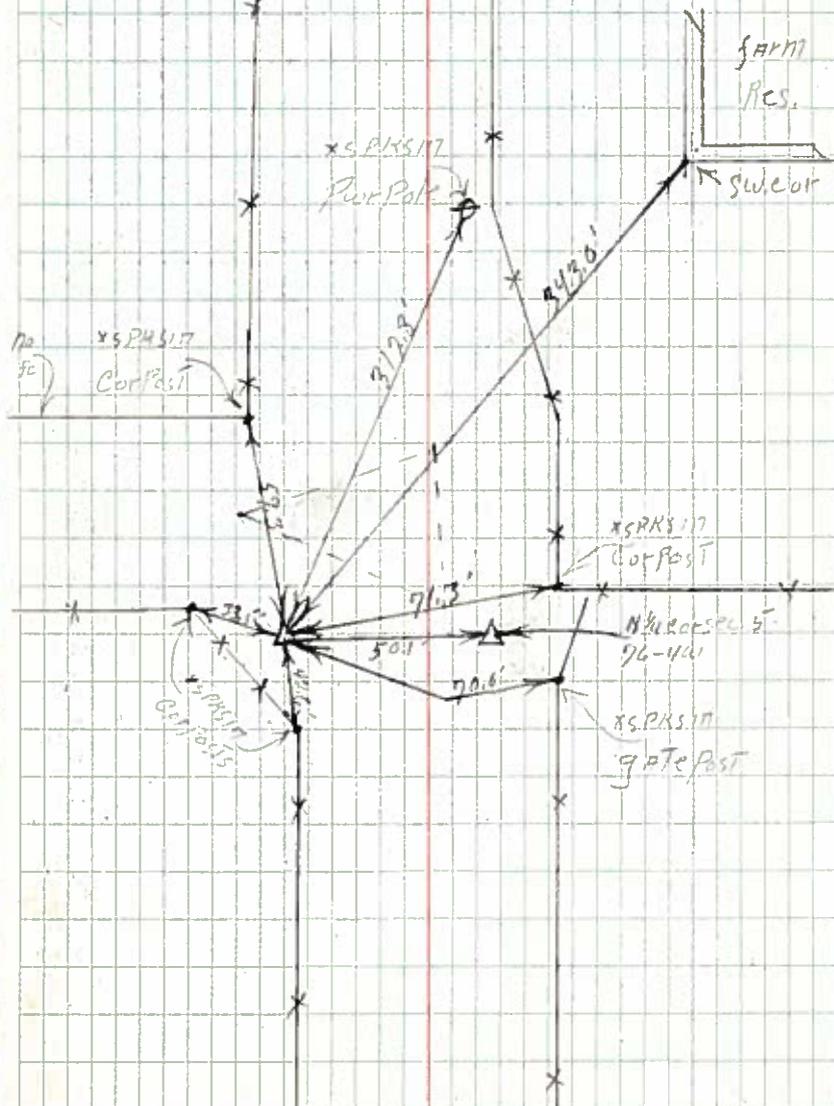


S $\frac{1}{4}$ cor sec 31 - T77N R4W -

on S side of E & W Rd inline
with fc N dug Hole 5' x 5' x 3' deep
No evidence found corner Restored
on E & W line Between Known
corners and inline with fc N.
Records show that Road No. was
all taken E of $\frac{1}{4}$ sec line. Proving
The W fc of Rd The $\frac{1}{4}$ sec line
Mon set on line with this fc No.
Iron STAMPED 31 and
Buried in cultivated field 12" deep
6.8' S of S. Row fc.

59.9' So. of X5PKS17 Cor Post
82.4' S.S.W. of X5PKS17 Cor Post.
99.6' SW. of SW cor of Farm Res
46.9' SW. of Cross in S. Headwall Conc Culvert
247.2' ESE of X5PKS17 Tel Pole
108.4' W. of N $\frac{1}{4}$ cor sec 6 - T76N - R4W -

11-28-39

RNW. Cor P.

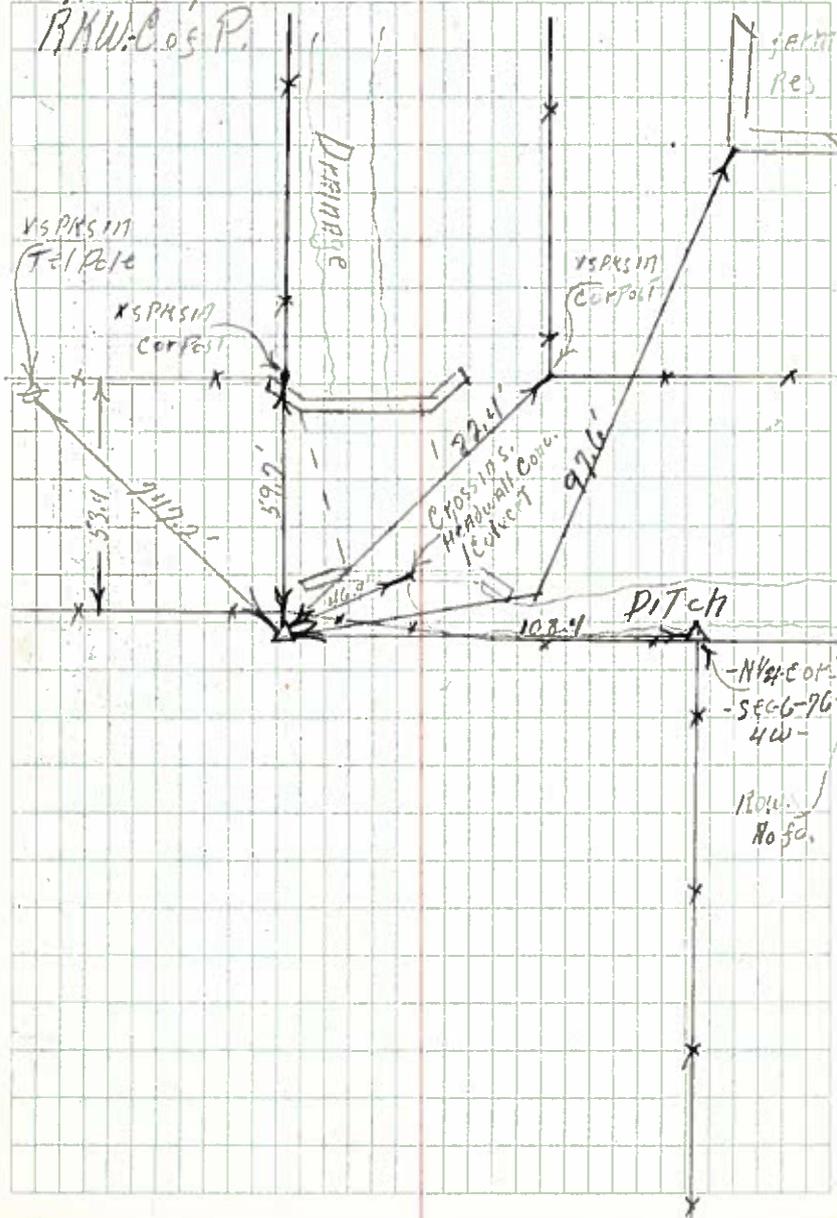


4

NE Cor sec 16-T77N-R4W-
 AT POINT indicated by
 measure found 4 ft same point
 Driven in ground Top exposed
 lowered same & placed C.M.
 Above stamped 9/10 AT SURFACE
 level Corner is ^{16/15} NEAR NW limits
 of Town of Nichols

170.6' S of sweat filling STATION
 30.0' S of XSPKS IN Power Pole
 85.1' NNE of XSPKS IN Pur Pole
 112.3' NE of NE Cor of Rock Island
 depot.
 186.8' NE of U.S.C. & G.S. B.M. # 977-17
 Base of leg of WATER TANK of CRI & P.R.R.
 71.1' ENE of MEMORIAL MARKER
 60.1' ESE of XSPKS IN Pur Pole

12-7-39


P.M.W. - Cog. P.

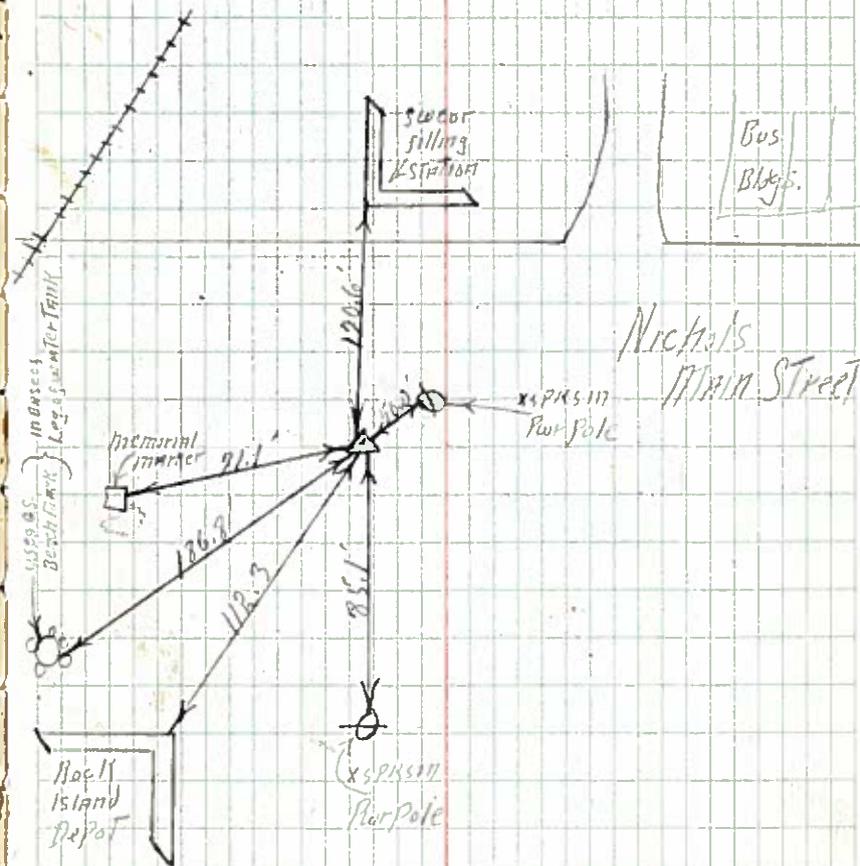

NE Corsec 21-T77N-R4W-
 in E of N45 Rd in line with
 few dug Hole 4x4x2' deep found
 iron rod 30" long Buried 15" deep
 lowered same and placed C.M. Above
 STAMPED 16/15 Buried 12" deep.
 21/28

33.2' E of XSPKSI in Cor Post
 143.3' S.S.E. of XSPKSI in Pur Pole
 56.3' S.W. of XSPKSI in Tel Pole
 106.0' N.N.W. of XSPKSI in Pur Pole
 97.8' NE of NE Cor E. Elder farms.

12-2-39
 R4W-Cor P.

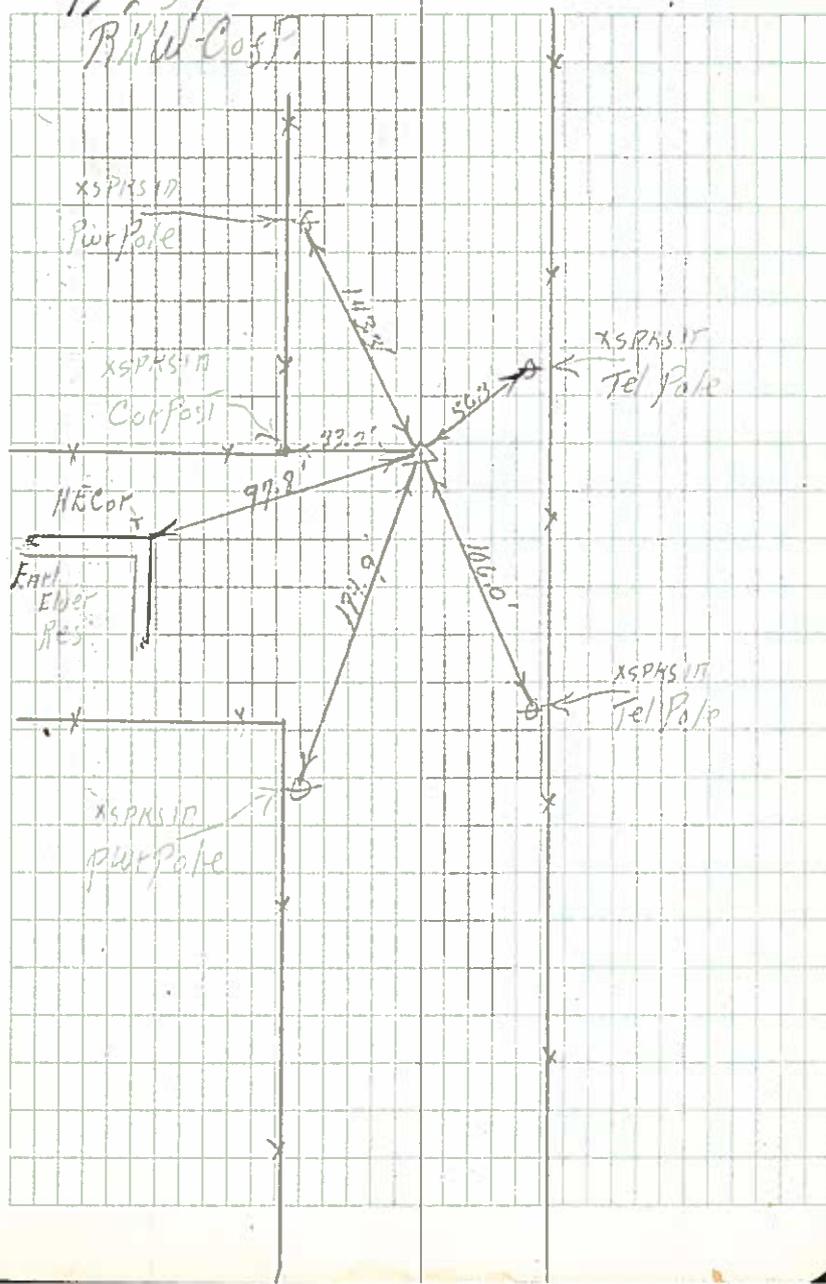

6


NE. Cor sec 28-T77N-R4W-

in intersection of Rds N4S and
E4W dug Hole 6x5x3' deep found
sandstone 10x8x5" Buried 17" deep
lowered same and placed C.M. above
STAMPED 21/22
28/22

40.0'	SW.	of XSPKSN Power Pole
38.4'	NW.	of XSPKSN Tel Pole
42.7'	NE.	of XSPKSN Power Pole
42.1'	SE.	of XSPKSN Gate Post
356.3'	SSE.	of XSPKSN Power Pole

12-2-39

R/W-C of R.

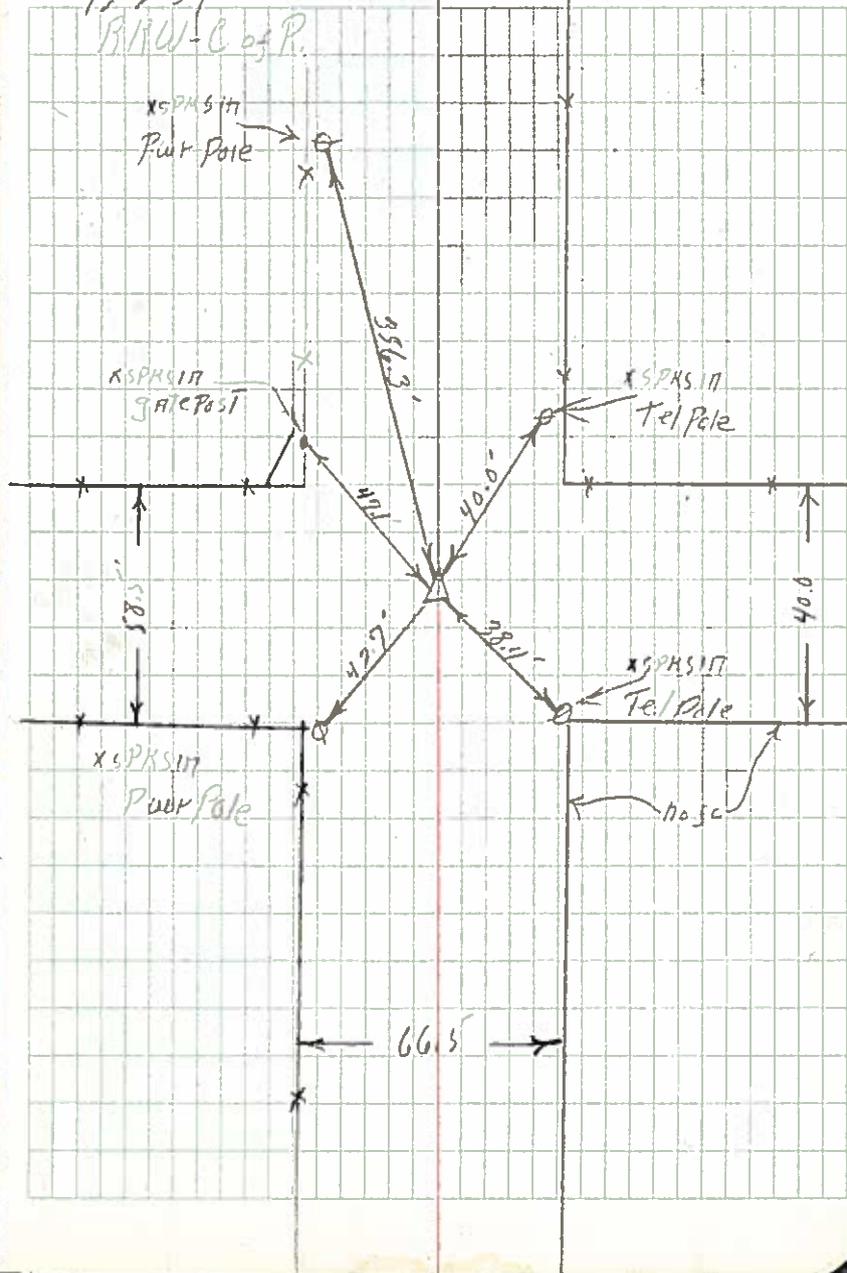

7

NE corner 30-777 NP-4W-

In ϕ of E4W Rd inline of ϕ
of N4S Drained ditch found
double wood HUB 12" deep on top
of concrete Culvert drilled hole
in culvert and set BRASS CAP

STAMP'd 19/25 DIRT 15" deep on
30/29 Top of Culvert

Ditch is recorded as being
on section line

12.0' N of cross in S. Headwall of Culvert

11.8' S. of cross in N Headwall of Culvert

50.2' S.W. of XSPK517 Cor Post

44.3' N.W. of XSPK517 Power Pole

30.7' N.E. of XSPK517 Cor Post

261.3' E.N.E. of XSPK517 Power Pole

33.6' S.E. of XSPK517 Cor Post

675.9' E.S.E. of S.E. cor ALBERT WHITEACRE
Res.


12-2-39

RKW-C of P.

ALBERT WHITEACRE

Res

S.E. cor

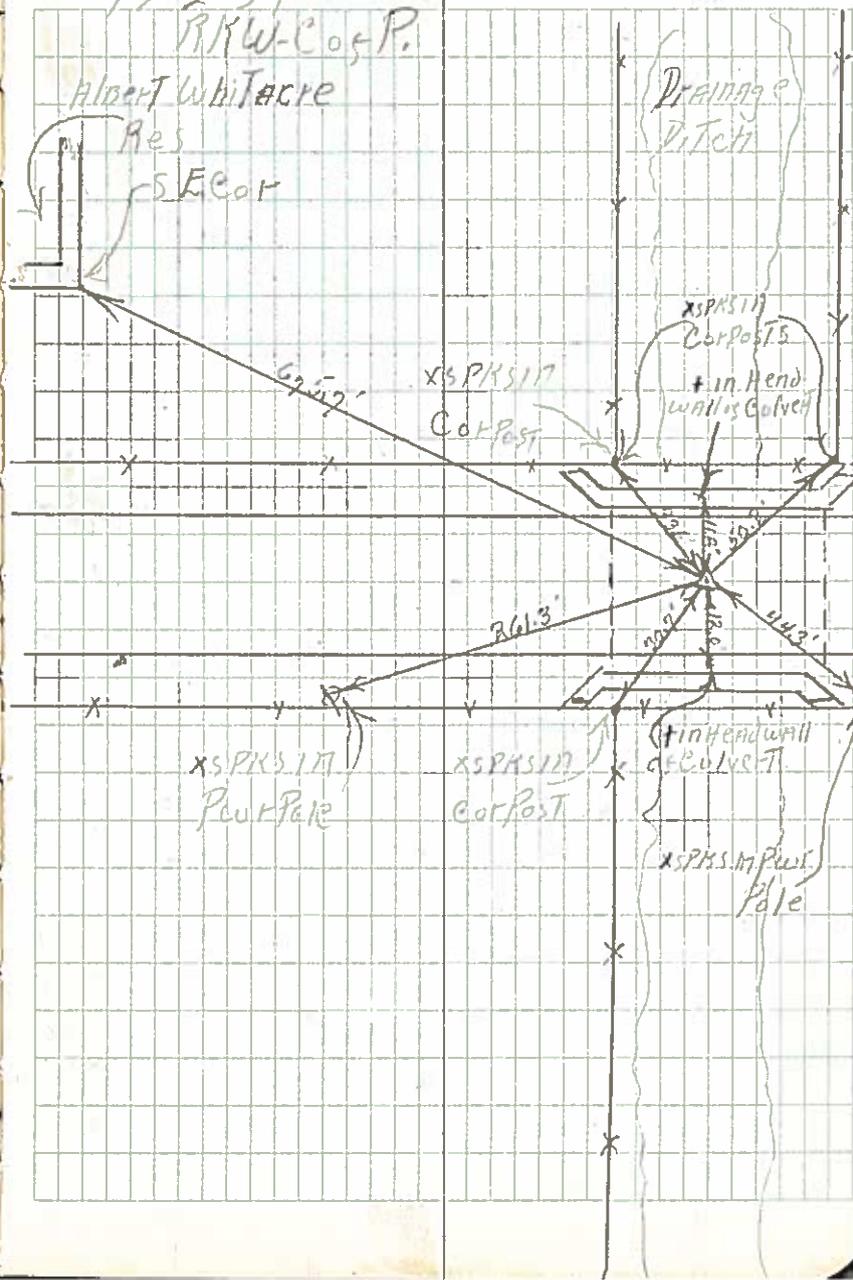

9

NR. Corsec 9-T77N-R1W-


IN $\frac{1}{2}$ of N45 Rd in line with
 fc E. dug Hole 4' x 3' x 2' deep found
 3/4 iron pin 2 ft long Buried 20" deep
 lowered same and placed C.M. Above
 STAMPED $\frac{43}{10}$ Buried 17" deep

There is a fc. W. 17' ft S. of fc
 E.

33.4' W. of XSPKSI17 CO-POST
 114.5' N.W. of XSPKSI17 BRACE POST
 97.2' NNE. of XSPKSI17 TEL POLE
 37.1' NE. of XSPKSI17 CO-POST fc. W.
 37.6' SSE. of XSPKSI17 TEL POLE

12-4-39

R1W-C of P

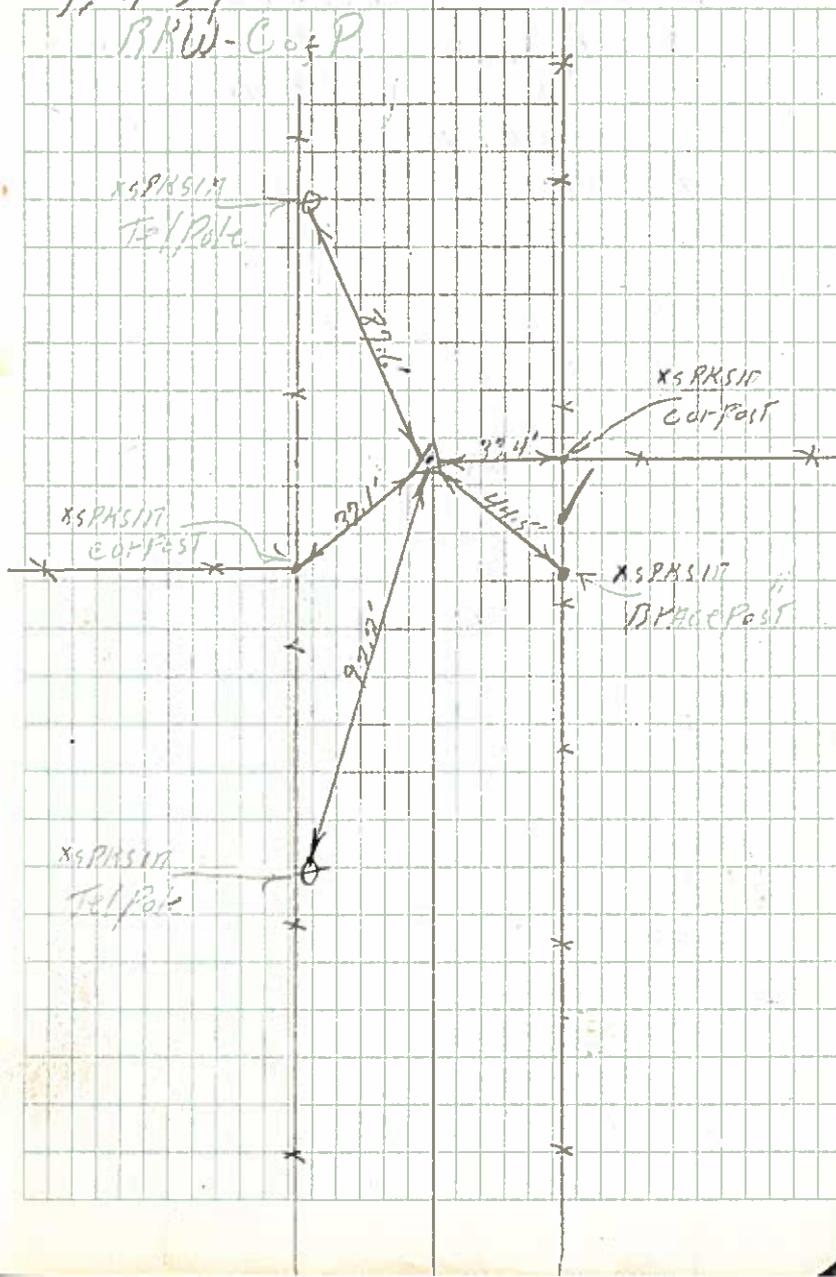


W $\frac{1}{4}$ cor sec 10 - T79N-R4W -

17' ϕ of N&S Rd. in line with
fcs E & W dug Hole 4x4x2' deep
found $\frac{3}{4}$ " Wilson Rod 30" long
Buried 12" deep lowered same
& placed C.M. above stamped
9/10 Buried 12" deep

32.9' E of XSPK517 Car Post
37.6' E.N.E. of XSPK517 Hedge Place Post
20.8' N.N.E. of XSPK517 Tel Pole
96.7' S.S.E. of XSPK517 Tel Pole
38.9' W.S.W. of XSPK517 Gate Post.

12-4-39

R.M.W. - Co. P.

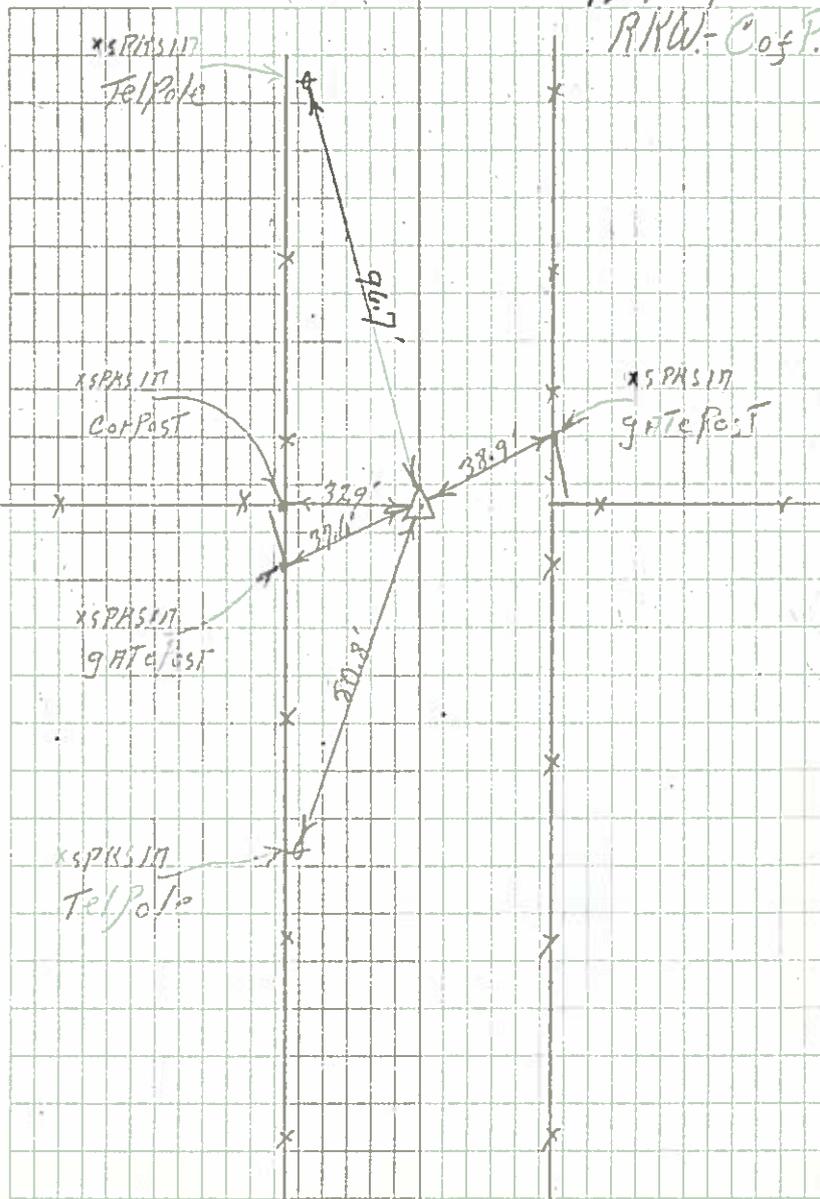

11


N $\frac{1}{4}$ corsec 8 - T77N-R4W-

in line with d.b.s. Pds was
 and in line with f.c. N&E found
 lime stone 21" x 16" x 8" point up
 Buried 4" deep lowered same
 and placed C.M. above stamped $\frac{5}{8}$
 Mon. Buried 12" deep.

33.9' S of xSPK517 Cor Post
 49.0' NW. of xSPK517 Tel Pole
 94.8' NE of xSPK517 Hedge Brace Post
 34.3' SW. of Blazed 50" Maple
 298.5' W.S.W. of S.W. Cor. of Farm Res

12-4-39

R.M.W. - Cas P.

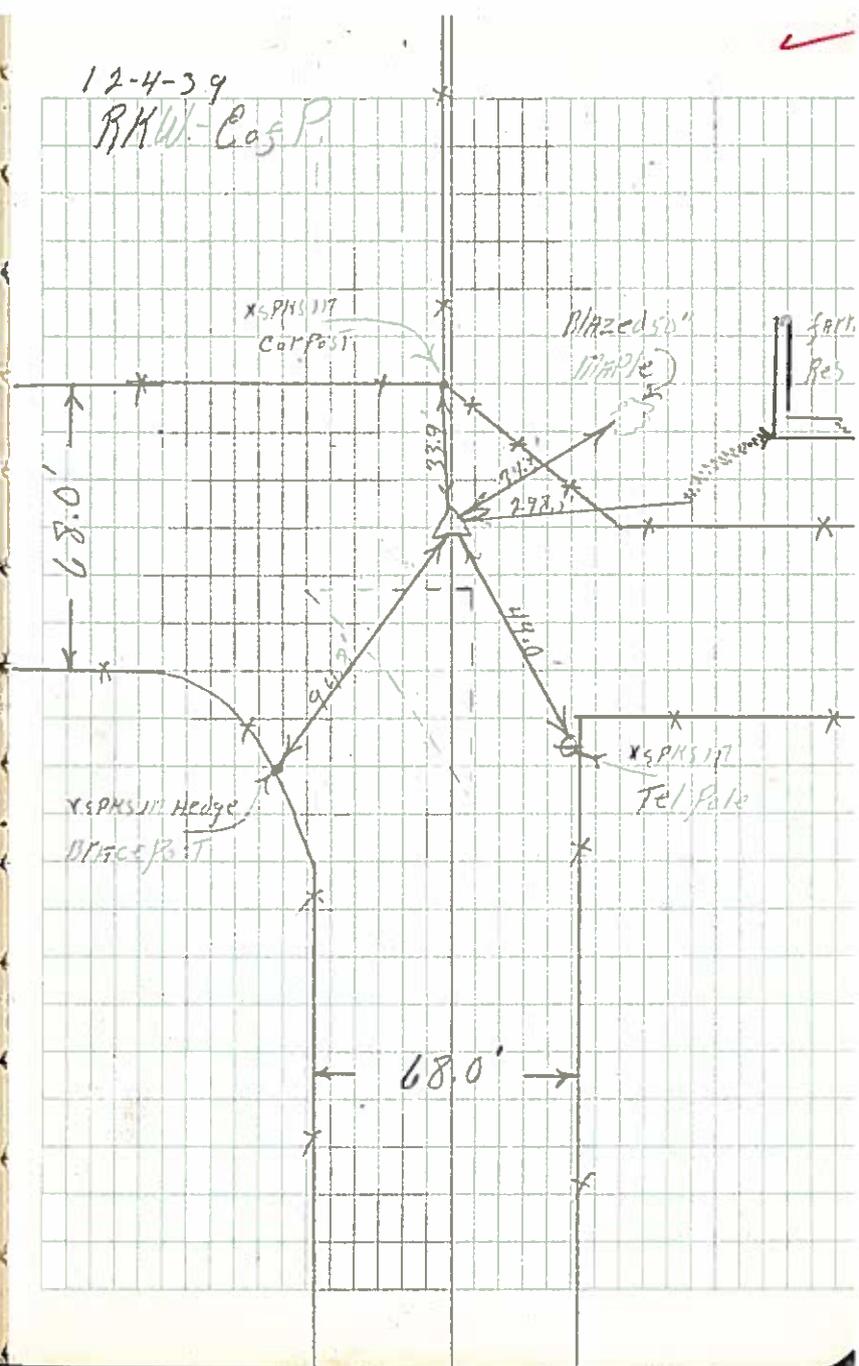

NE cor sec 18 - T77N - R4W -


17' E of N4S Rd in line with
 E of Rd W dug hole 6' x 5' x 2' deep
 found 3/4" iron pin 3 ft long lowered
 same and placed 17' above
 STAMPED 9/8 Buried 12' deep

18/17

263.2' SSW of XSPK517 BRACE Pole
 267.5' SSE of XSPK517 Pur Pole
 84.5' ESE of XSPK517 BRACE Pole
 64.7' E of XSPK517 Pur Pole
 100.6' NNE of XSPK517 Pur Pole
 83.1' NNW of XSPK517 BRACE Pole

12-4-59

R11W - Co of P.

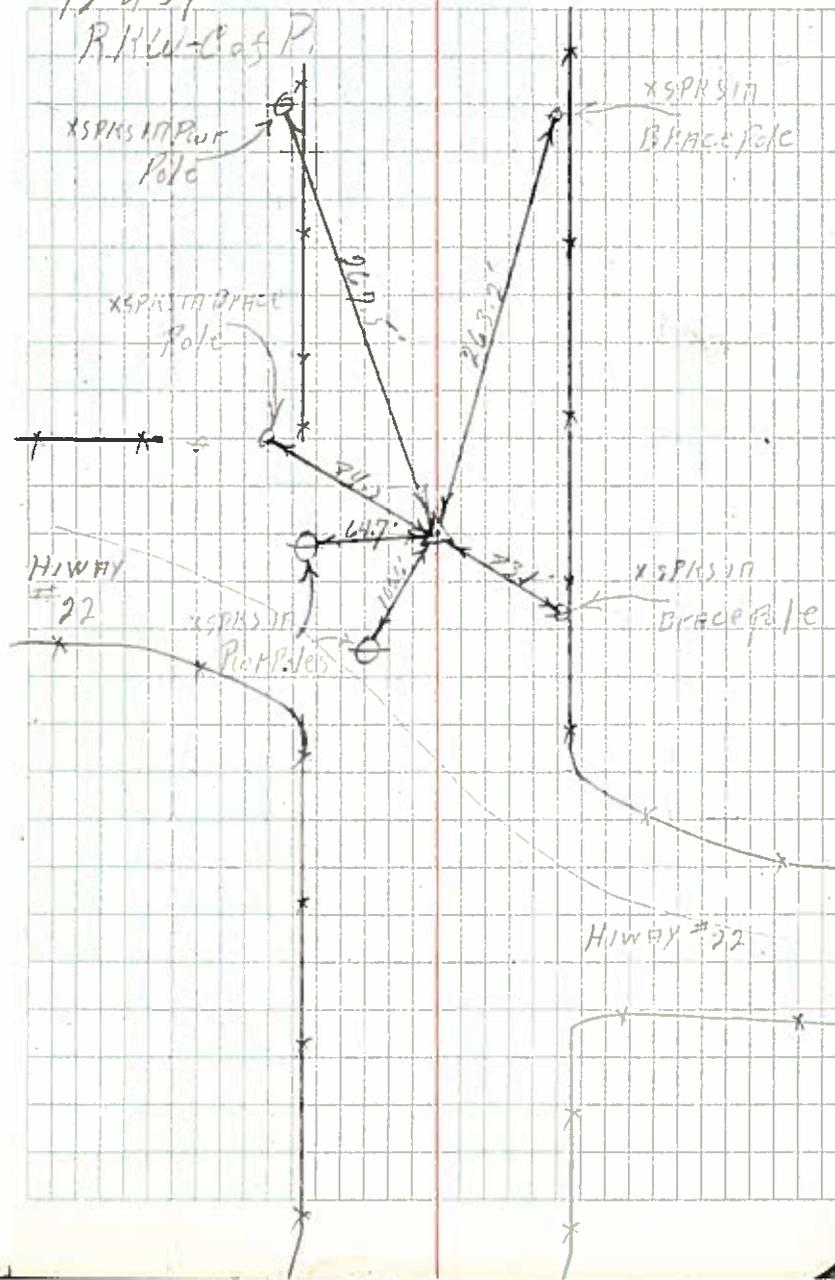


W $\frac{1}{4}$ corsec 5-T₇N-R4W-
 in & of 145 Rd in line with
 fcs E & W dug Hole 3'x3'x3'
 deep found white limestone
 2'x6'x4" Buried 3' deep on Top
 of Steel Culvert placed e.m.
 Above same stamped 6-5
 Buried 6" deep

32.7' W. of XSPMS 17 Cor Post
 35.0' E. of XSPMS 17 Cor Post
 65.7' SW. of XSPMS 17 Tel Pole
 143.0' S.S.E. of XSPMS 17 Pur Pole
 303.9' N.N.E. of XSPMS 17 Pur Pole
 289.3' N.W. of NW. cor farm Res

12-5-39

R4W-Cor P.

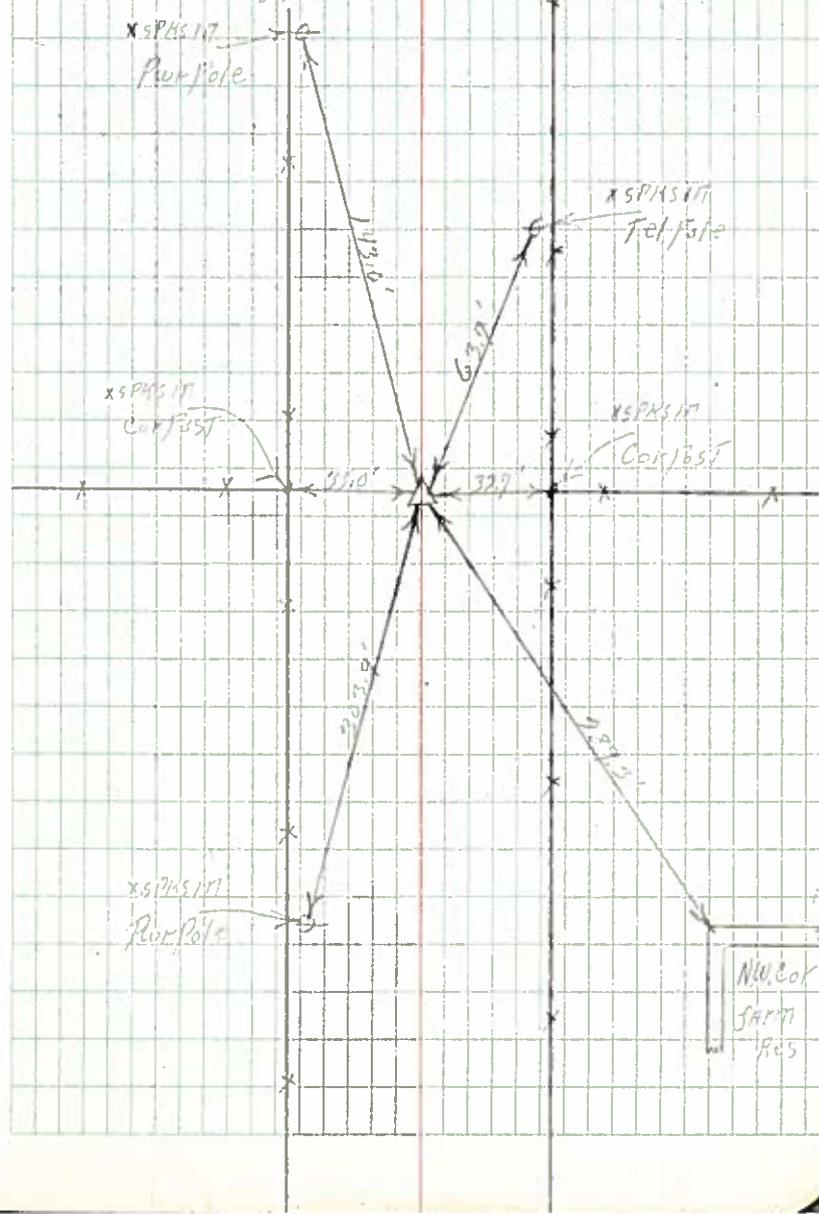

NE Cor sec 8-T77N-R4W-


AT intersection of fcs N-S and
 fcs W. Dug Hole 6' x 3' deep. No
 evidence found. Corner Restored
 The N+S fcs. is in E of old ABAN-
 doned Road which is on N+S
 sec line No sec. line fcs. E from
 corner set C.M. stamped

54	AT surface level
89	

27.1' ESE. of Blazed 8" Hedge
 191.2' SSW. of Blazed 24" Wild Cherry
 81.8' NNE. of Blazed 12" Hedge
 201.5' NNW. of Blazed 26" Wild Cherry

12-5-39

BKW-Cof.P.

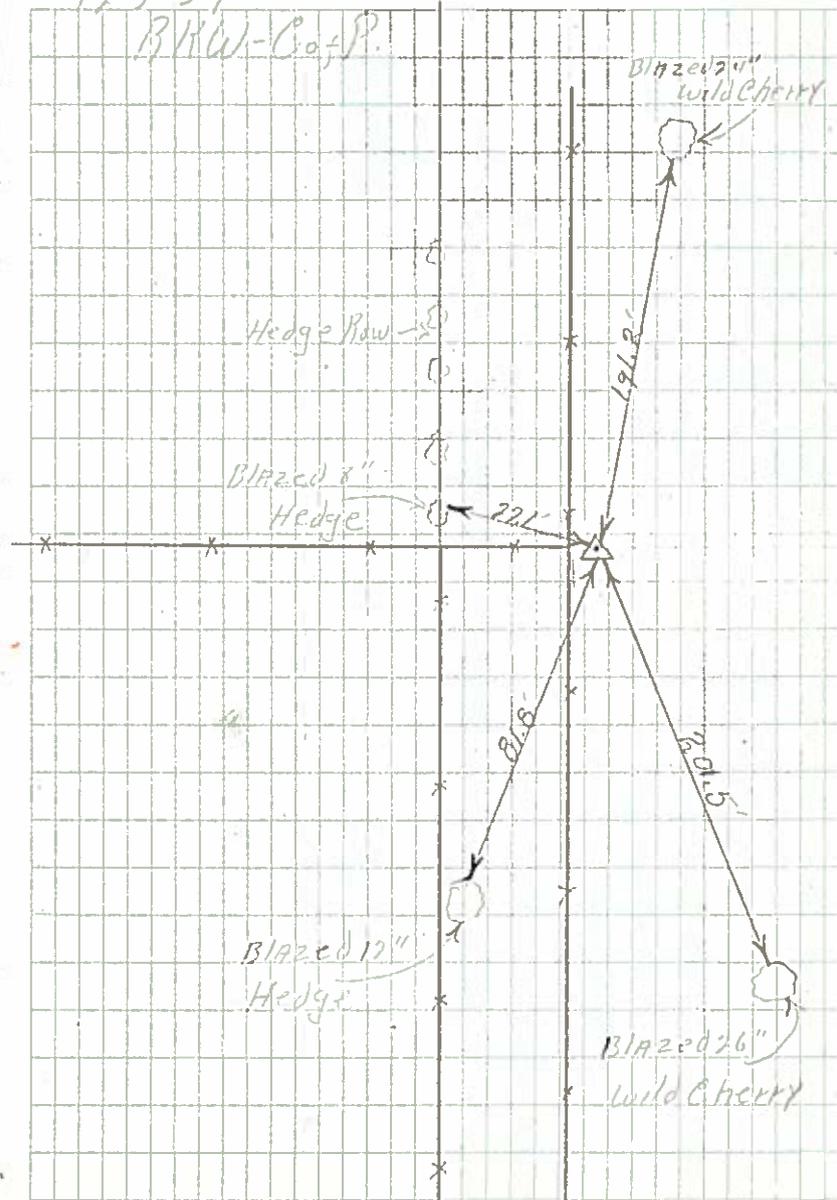

N 1/4 Cor sec 18-T77N-R4W-

117' of E W Rd in line with
fcs N & S dug Hole 5' x 4' x 3' deep

No evidence found Corner restored

Mon set on feline N & S
Being Best Evidence To Corner.


Mon STAMPED 7 4

Buried 12" deep 18

32.9' S of XSPHS17 Cor Post
 31.4' S of Blazed 6" Hackberry
 172.6' W.S.W. of P.R. Warning sign.
 76.9' NW. of X.PHS17 Post Pole
 33.0' N. of XSPHS17 Cor Post
 65.8' NE. of XSPHS17 Post Pole
 429.1' E of E.Rail. of C.R. & P. RR.

12-6-39

P.R.W. Co. of P.

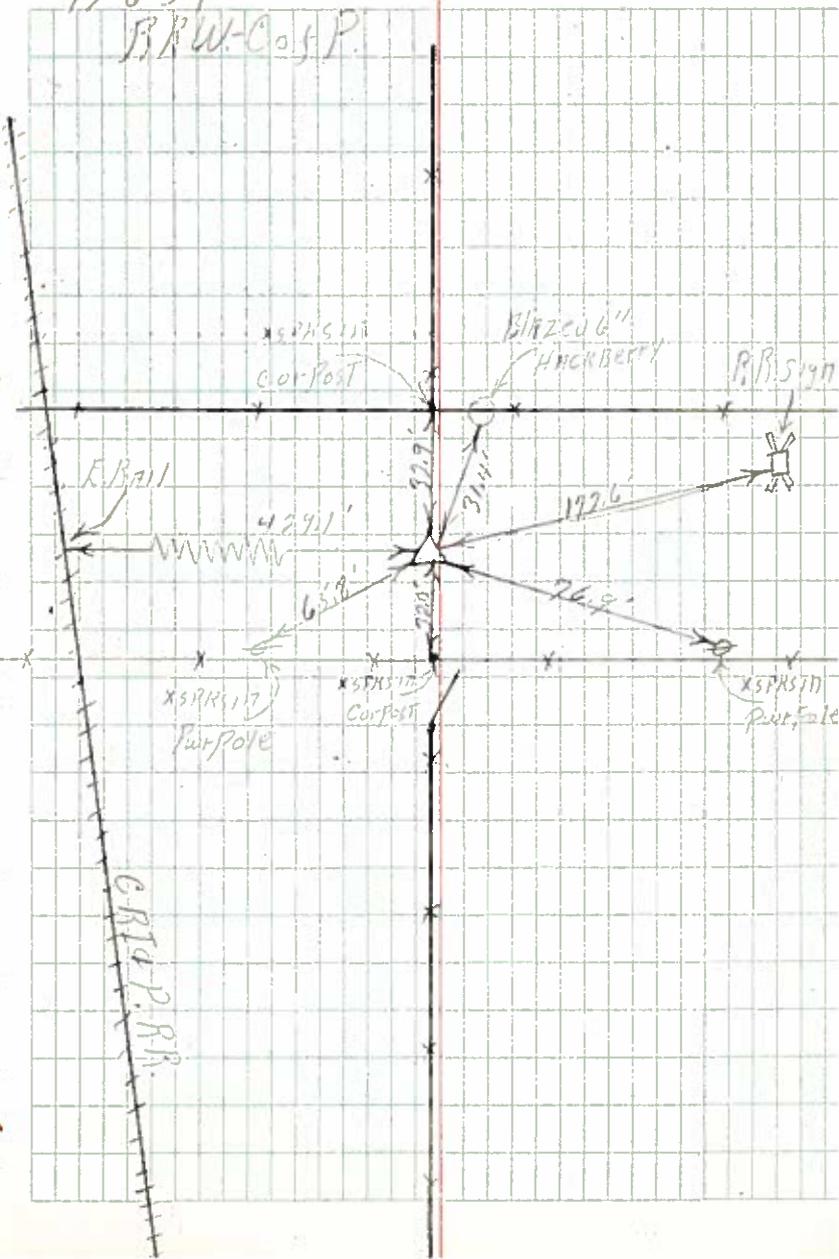

1/4 corsec 8-T77N-R4W-

INT. of NW SRD in line with

for E & W - dug - Hole - 4'x4'x3' deep

No - evidence - found - Corner - Restored

for - Best - evidence - to - original -


LOCATION - of - Corner -

Set - Mon - Stamped - 7 | 8

23.5'	E	of XSPKSI17 Cor Post
25.3'	W	of XSPKSI17 Cor Post
165.6'	S.S.W.	of XSPKSI17 Post Pole
31.3'	N.W.	of Blazed 16" Hedge
187.9'	S.S.E.	of Cross in W Headwall - Conc. Culvert
185.5'	S.S.W.	of Cross in E Headwall - Conc. Culvert

12-6-39

R4W - Co of P.

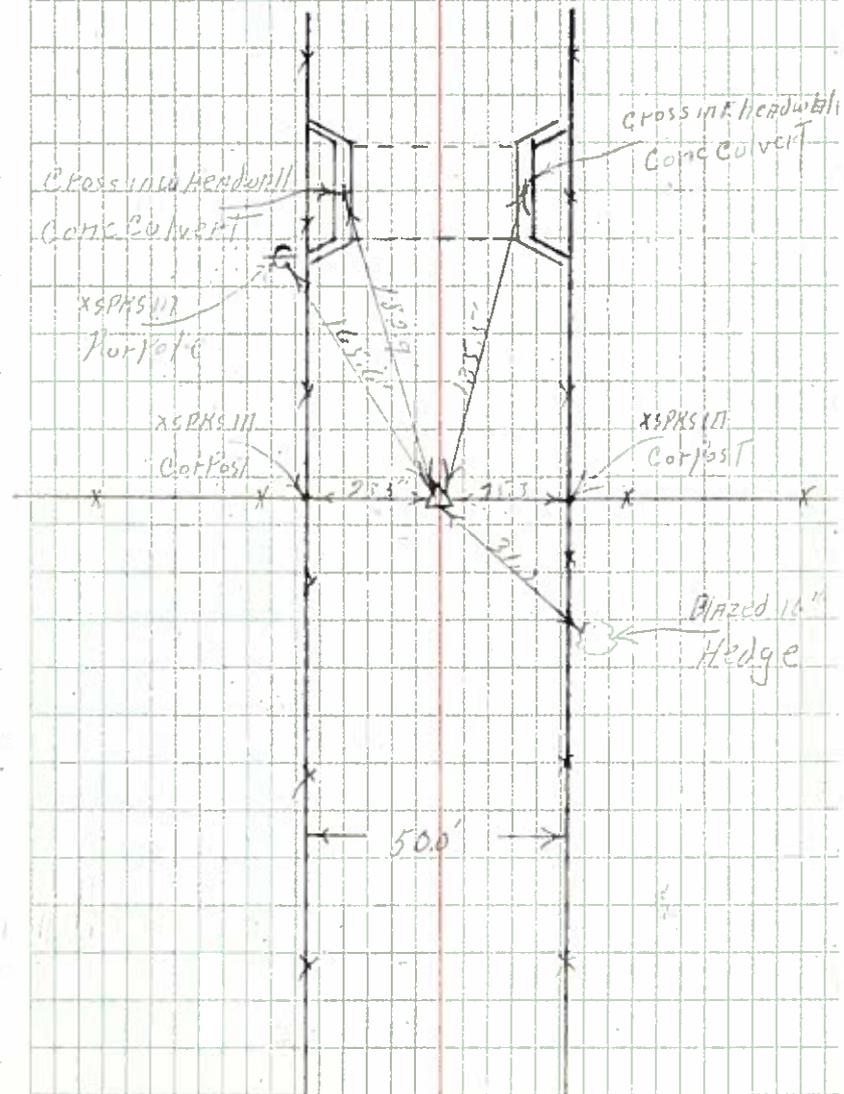

N¹/₄ Cor sec 21 - T72N - R4W -

AT POINT INDICATED BY MEASURE
dug Hole 5' x 5' x 3' deep No evidence
found Corner restored. No. of
No. of Co. from This cor.


Map placed AT PROPORTIONATE
MEASURE BETWEEN SEC CORNERS E4W

THE STAMP OF 16 BUREAU
17" Deep 21

36.2' S. of USC & GS. B.M. # H-77
38.5' NE of xSPK517 Cor Post
47.6' W. of C of CTRRR.
85.8' NW. of xSPK517 Tel Pole
159.5' SE. of xSPK517 Tel Pole
211.8' W. of xSPK517 Cor Post fc E.

12-7-39

R4W - Co. P.

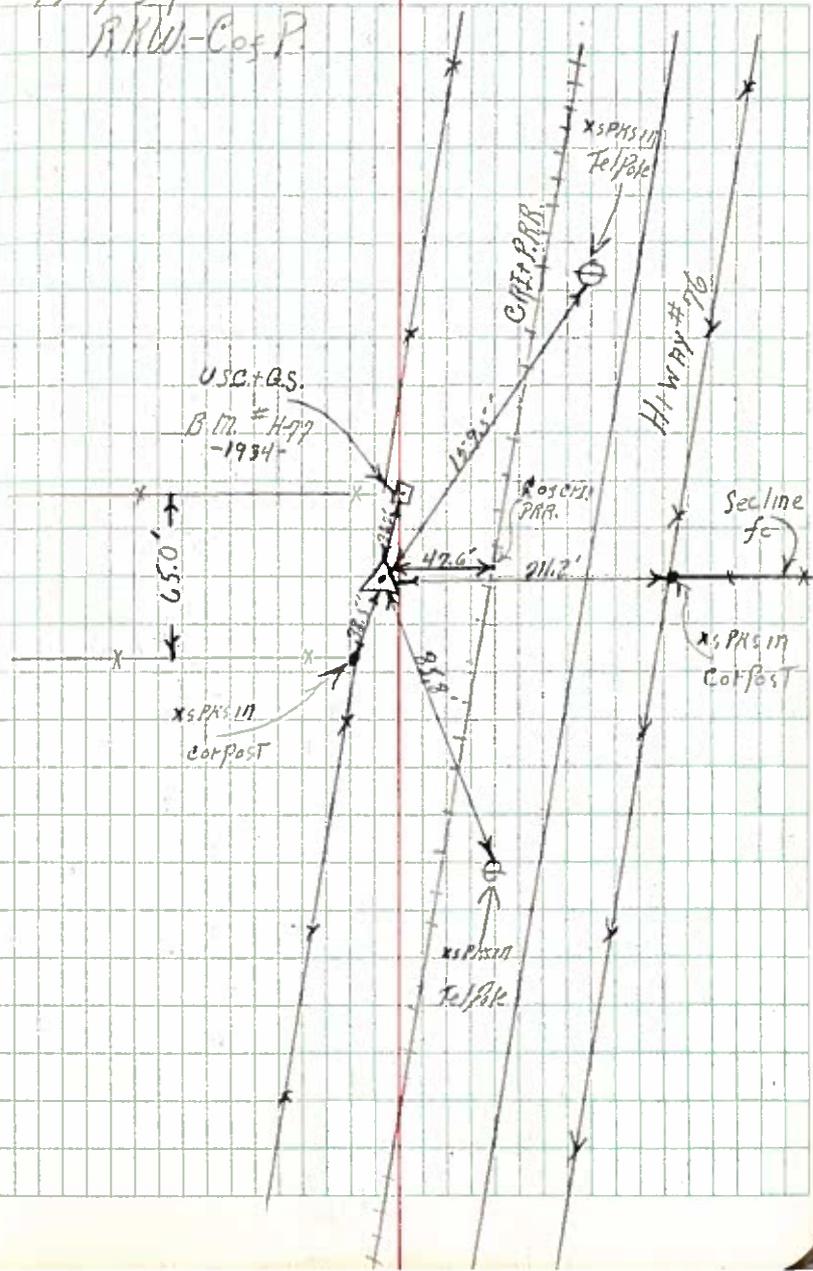


19

W^{1/4} cor sec 18 - T77N - R4W -
 AT-INTERSECTION- of - N45 - fc - AND -
 old - fc - line - W - dug - Hole - 6x3x2' -
 deep - No - evidence - found - Corner -
 restored - AT-INTERSECTION- of - fcs -
 being - The - Best - evidence - to -
 original - location - of - Corner -
 then - STAMPED - 18 - AND -
 Top - flush - with - ground -

65.5' N - of - xSPHS17 fc - post
 213.9' SW - of - Blazed - 12" - group - willow -
 6.6' S - of - Blazed - 14" - Cherry -

17-7-39

13NW - Co of R.

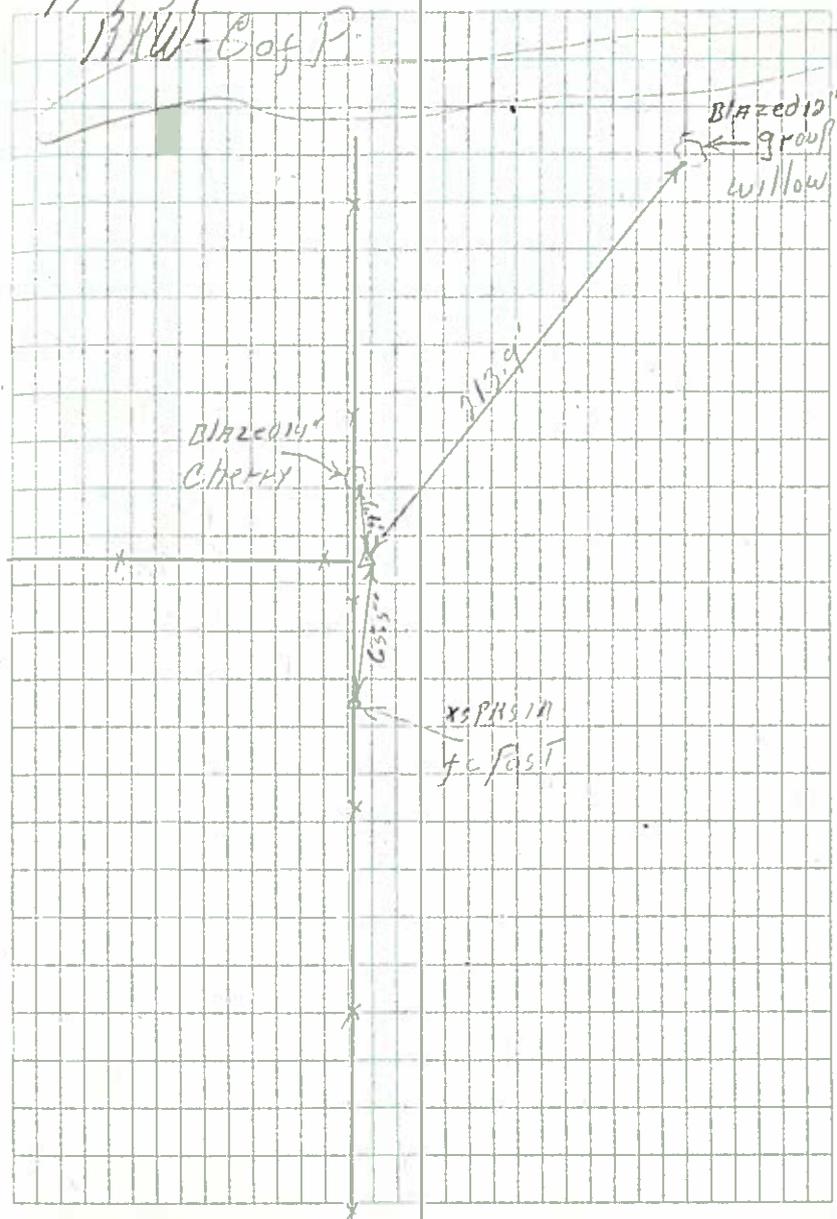


MF cotsec 24 - T 77 N - R 4 W -
 AT INTERSECTION of MF S fc
 AND fc E found white injection
 10 8 x 6" AT SURFACE level
 lowered same and placed
 C/M ABOVE STAMPED 13/13
 BURIED AT SURFACE level 21/19

98.7' S. of BLAZED 8" Birch
 2.4' W. of BLAZED 6" WALNUT
 29.5' W. of BLAZED 18" W. OAK
 46.9' NW. of BLAZED 18" WALNUT
 159.9' N. of BLAZED 28" Elm
 29.1' N.E. of BLAZED 6" WALNUT
 39.7' E. of BLAZED 26" WALNUT

12-13-39

T 77 N - R 4 W - C of P

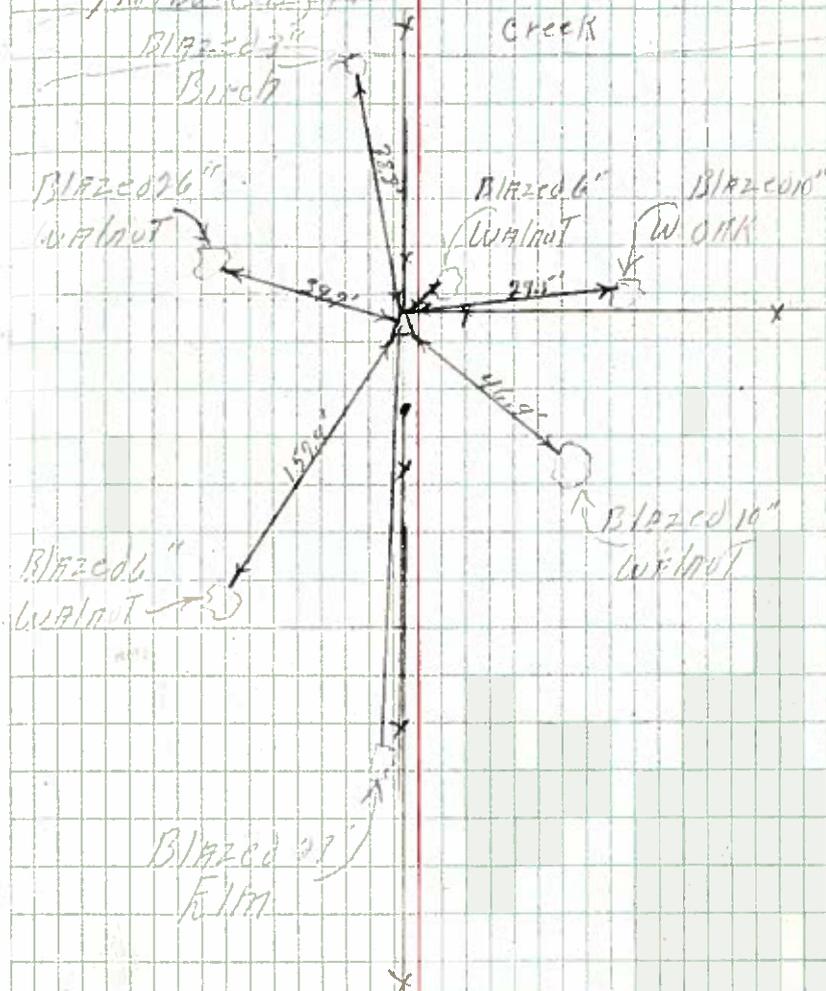

21

N $\frac{1}{2}$ Corsec. 34 - T77 N-R 4W -

At intersection of E & W fc
and fc N dug Hole 4x4x3 deep
No evidence found Corner Restored
Corner HAS BEEN preserved by
ADJACENT LANDOWNER'S. A Hedge line
goes EAST. SET C M AT SURFACE
level STAMPED


27

34

67.1'	E	of XSPKSIW Cor Post fc S.
13.8'	W.	of Blazed 14" Hedge
23.9'	S.E.	of XSPKSIW BRACE POST
17.9'	S	of XSPKSIW GATE POST

12-13-39

R 4W - Co & P.

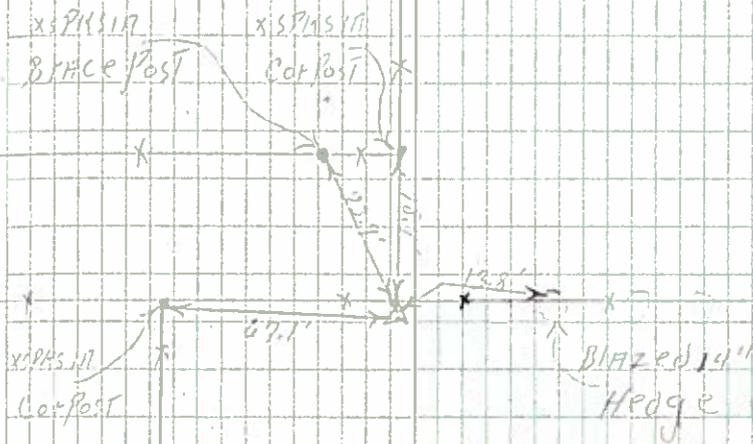

22

NE Corsec 22 - T77 N-R4W -


AT INTERSECTION of gas E+W AND
S. dug Hole 6'x4'x4' deep found
Hard Sandstone 18'x17" flat end
up. lowered same and placed C.M.
Above STAMPED $\frac{13}{22} \frac{14}{23}$ AT
SURFACE level

12.1' N. of XSPKS IN BRACE Post
72.9' E. of BLAZED 6" HACK BERRY
2.5' N. of Cor Post

12-12-39

R.R.W. - Cor P

BLAZED 6"
HACK BERRY

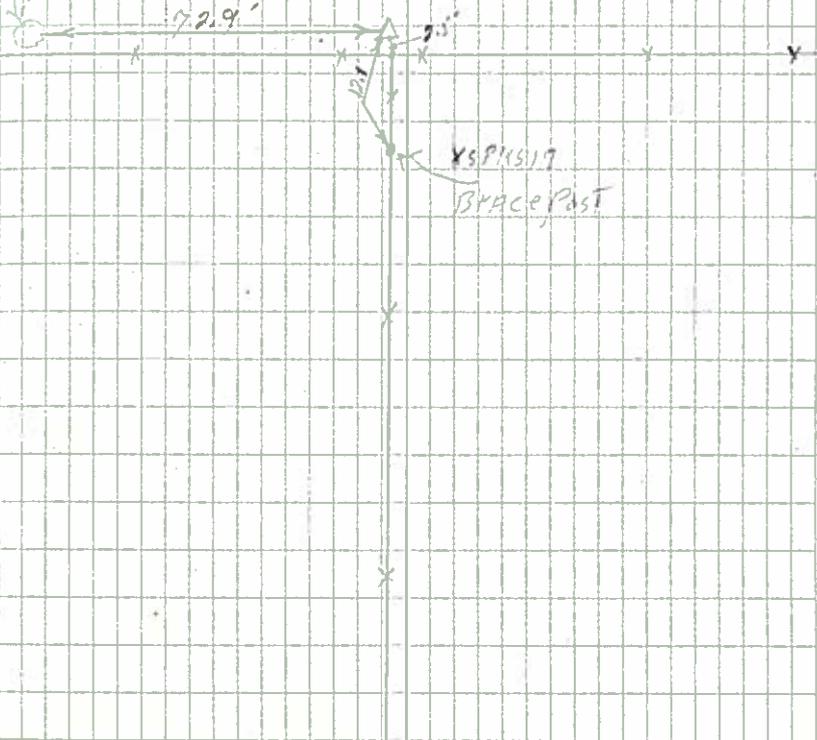


W 1/4 Cor sec 23 T79 N-R4W-
 17' E of E & W. Rd in line
 with fc N. dug Hole 8' x 6' x 3' deep
 No evidence found. Corner Res-
 tored. Cent. of Rd agrees
 with measurements between
 sec cor N45 Road laid out on
 1/2 Sec line.

20.9' NNE of xSPK517 fc Post
 19.9' N. of xSPK517 Cor Post
 20.7' NW. of Blazed 36" group MAPLE
 32.5' S.W. of Blazed 16" maple
 34.7' S. of Blazed 17" group HACK BERRY
 17.7' S. of xSPK517 Cor Post.

17-12-39

R4W-Cor P

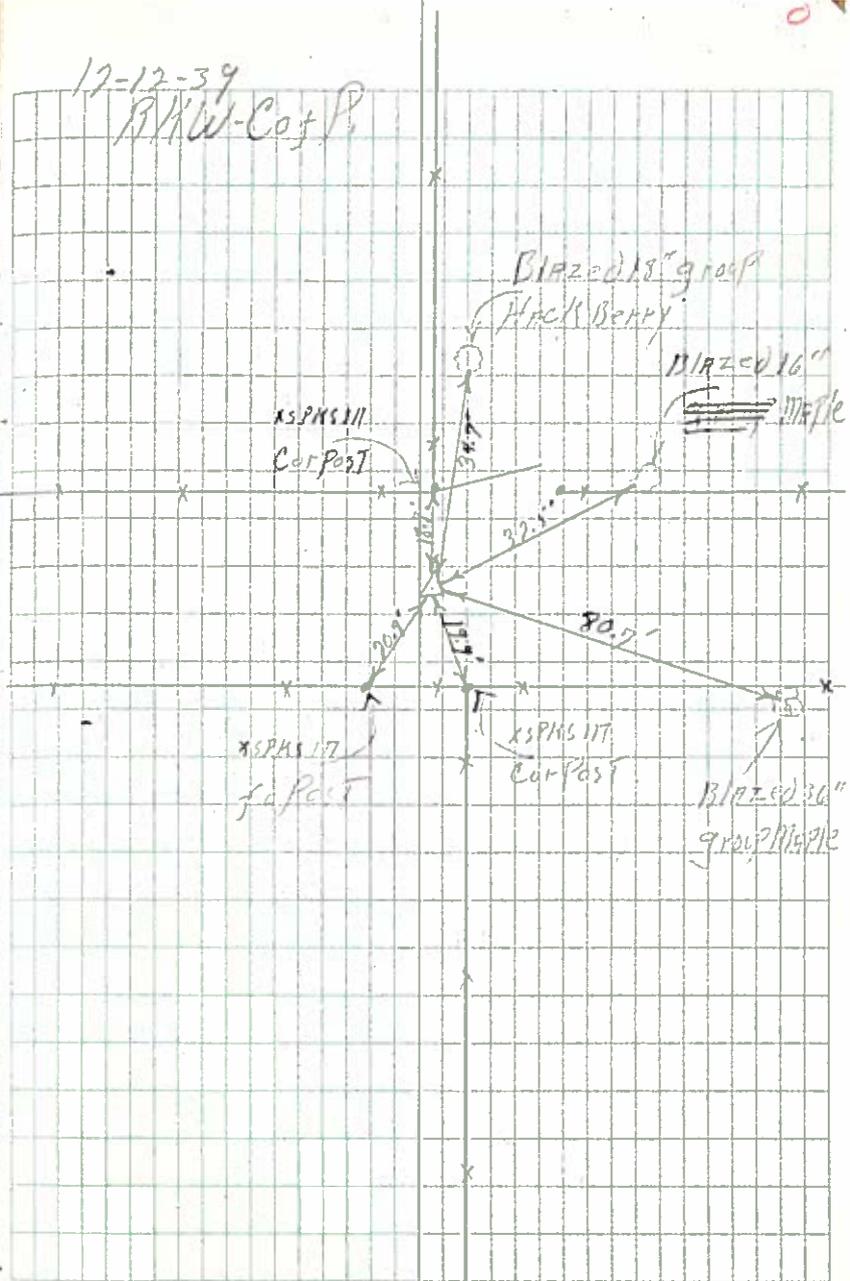


24

E-2

W 1/4 cor sec 1 T7N-R4W
 AT INTERSECTION of fcs N4S
 AND E+W dug Hole 5'x5'x2' deep
 No evidence found Corner Restored
 F&W Use ec fc Checks with
 MEASUREMENTS To sec cor N4S,
 Corner MAINTAINED BY ADJACENT
 LAND OWNERS; SET IN STAMPED
 SET IN SET AT SURFACE level

- 338.1' WNW. of Blazed 30" BURROCK.
- 10.7' N. of XSPKSN BRACE POST.
- 10.7' E. of XSPKSN BRACE POST.
- 90.5' S. of XSPKSN BRACE POST.
- 10.5' W. of XSPKSN BRACE POST.

12-11-39
 R.W. - C. J. P.

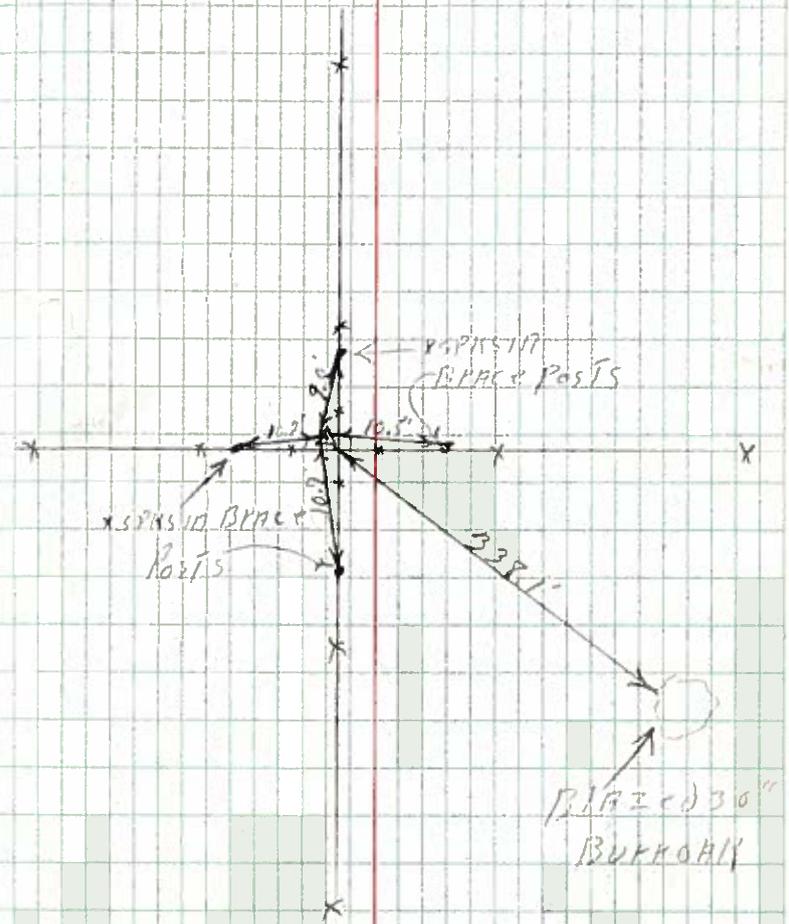


N 1/4 corner 17 - T77N-R40W -
 in ϕ of E & W Rd in line
 with fence Hedge Row S. dug Hole
 6x4x3 deep No evidence found
 corner Restored on line S & ϕ
 of E & W Rd.

Set iron stamps $\frac{18}{19}$
 & Buried 12" deep.

- 70.8' N of Blazed 13" Hedge
- 125.4' E.S.E. of Blazed 20" Boxelder
- 194.6' S.E. of S.E. cor to Smith Res.
- 109.9' S.S.W. of Blazed 12" Walnut
- 118.9' W.S.W. of Blazed 13" Apple
- 33.5' N.N.E. of XSPHS 17 BRACE POST
- 214.0' W.N.W. of Blazed ?" Twin Hedge

12-7-39

PHOTO of P

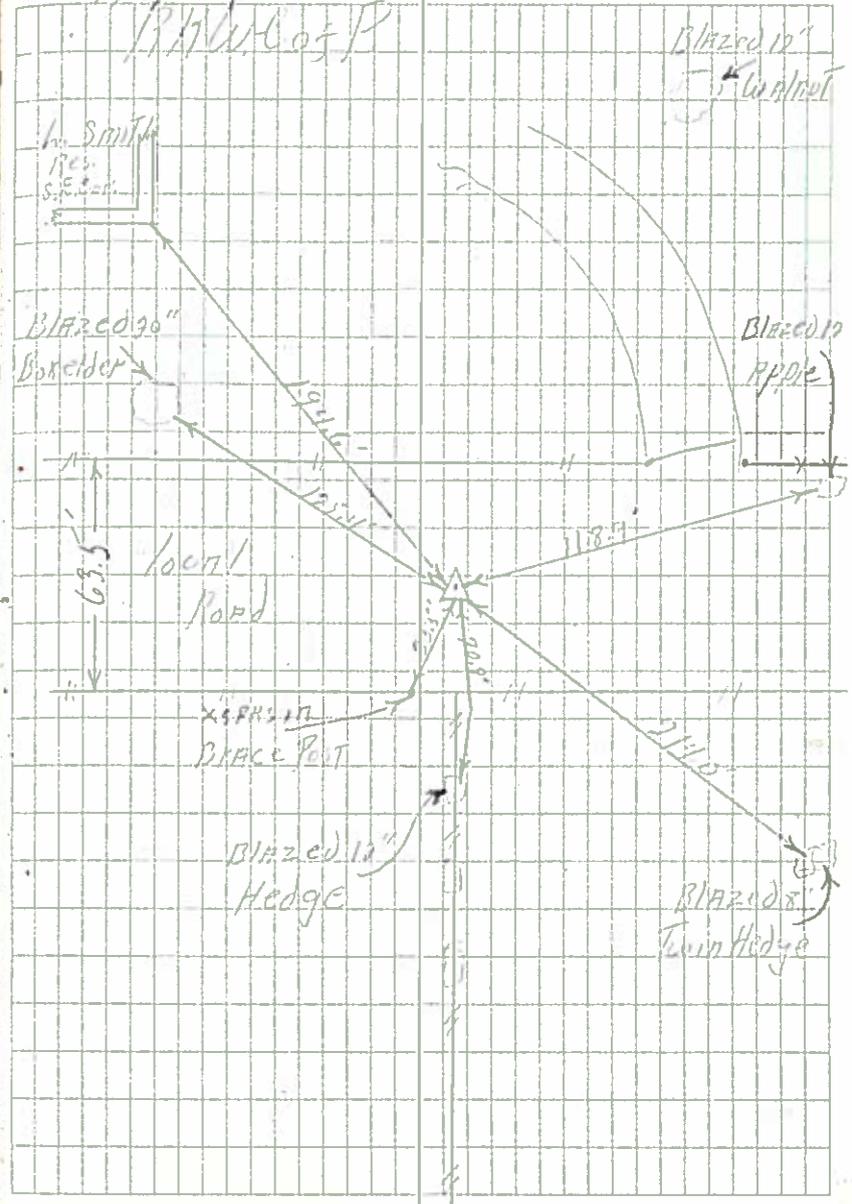

Smith Res. S.E. cor.

Blazed 20" Boxelder

63.5'

Local Road

XSPHS 17 BRACE POST

Blazed 12" Hedge

Blazed 12" Walnut

Blazed 13" Apple

Blazed 13" Twin Hedge

194.6'

125.4'

118.9'

214.0'

109.9'

33.5'

70.8'


N.E. cor sec 31 T77N-R4W-

Measure shows corner to be in
N.S. drainage ditch in E.W. Rd.
Drilled hole in concrete culvert & set
Brass cap stamped 30/24 cap is
approx. 14 deep. 31/32

- 14.0' S of center N. h n wall of concrete Culvert
- 13.9' N of axis in S. h n wall of concrete Culvert
- 36.4' N.N.E. of top of 1st Cor. Post
- 61.0' N.E. of top of 2nd Cor. Post
- 42.2' S.E. of (X) sign in Brass cap
- 48.3' S.S.W. of (X) sign in Brass cap
- 281.1' N.W. of N.E. cor. Will. grove school

12-7-39

N.W. - C of P.

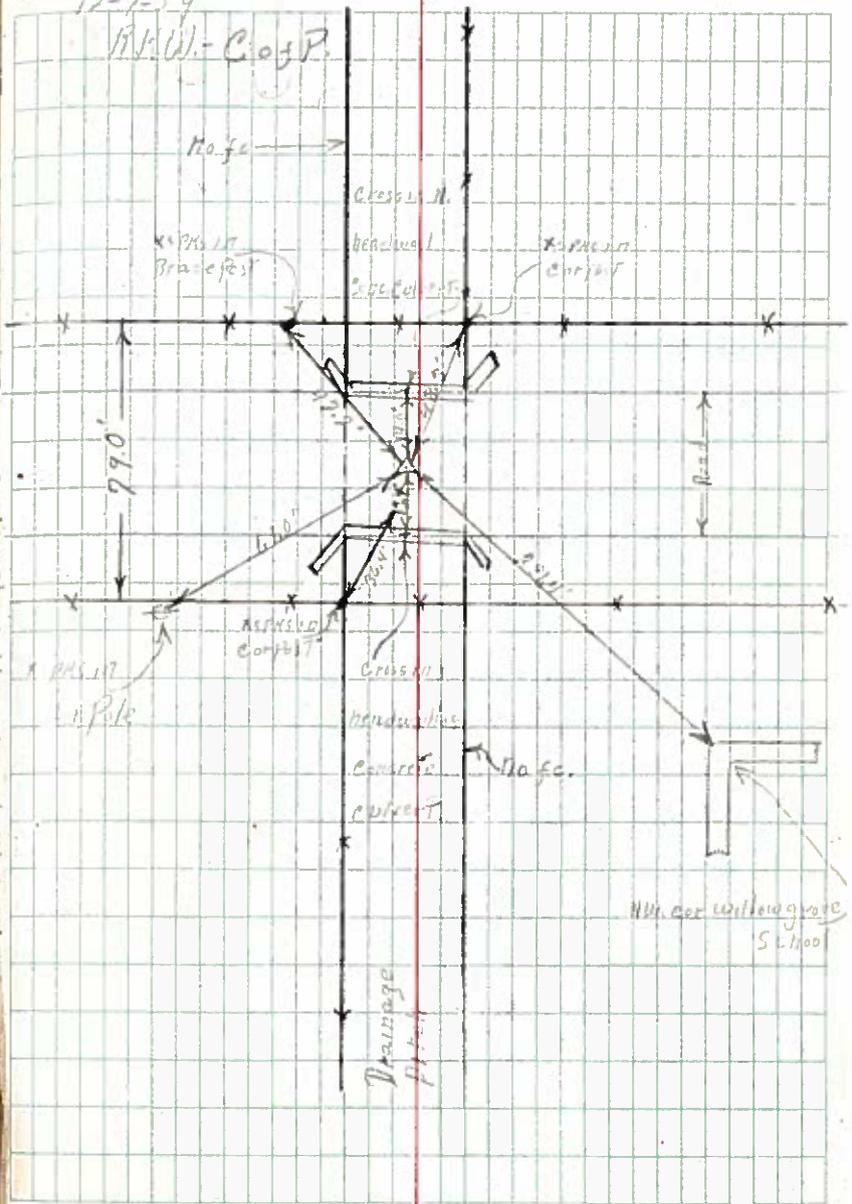

W 1/4 Corsec 2-T77N-R4W-


At intersection of N9S fc and fc W.
 dug hole 4x4x3' deep. No evidence found
 Corner Restored. Location of corner has
 been maintained by adjacent landowners at
 this fc intersection. Set C.M. Stamped
 Buried flush with surface

3/R

11.1'	N. of (X) spks in area P →
12.4'	S. of (X) spks in fc post
7.3'	SS.W of blazed 1" cherry
25.4'	S.W. of blazed 6" Cherry
29.0'	W.S.W. of blazed 6" Cherry

12-9-39

R.K.W. - Co of R.

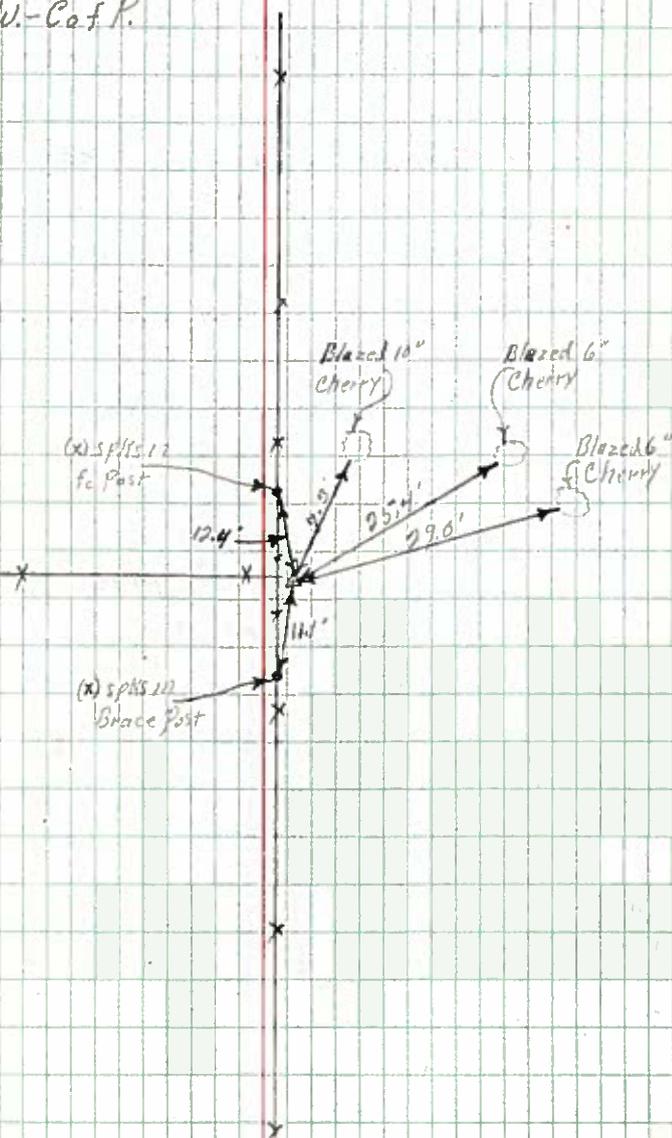

N.E. corner 10 - T99N-R4W

At intersection of sec N+S and E+W-
dug hole 8 x 12 deep. No evidence found.
An old Hedge Stump occupies the intersection
of sec. Corner restored. Set C.M. on S. side
of and adjacent to said Hedge stump.
Being the most logical location. According
to the farmer living S.E. of corner said
sec intersection has been accepted as
corner for at least 30 yrs.

Set man stamped 3/2
10/11

12.1'	S	of (X) SPRS 177 brace post
17.6'	W.	of (X) SPRS 177 fc post
16.2'	N.	of Blazed 4" tree

12-9-39

R.W. - C of P.

